


CDSVAN

Compact Transmitter MSI8V

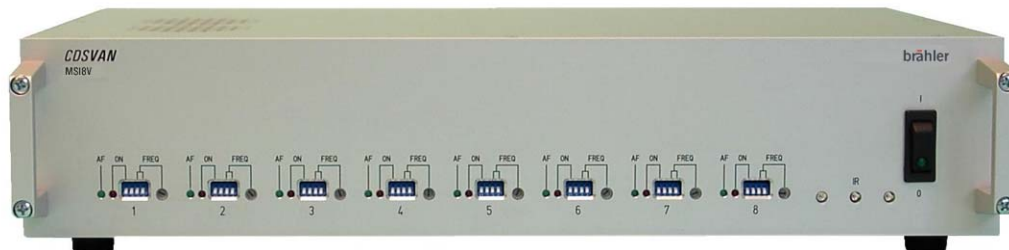

Description

The Compact Transmitter MSI8V is used within the CDSVAN Conference System for transmission of 8 audio channels by infrared light.

The audio signals are converted into frequency modulated infrared light and then transmitted by means of INFRACOM Radiators IRad, which are directly connected to the MSI8V. The original (OR) and up to 7 other languages can be simultaneously transmitted on different carrier frequencies by narrowband frequency modulation.

The transmitted signals are received by the INFRACOM Receiver IRX and can then be monitored by headphones.

With miniature-switches on the front panel the frequency band can be chosen and the channels can be switched ON or OFF. With a rotating switch it is possible to assign up to 32 transmission channels.

3 infrared transmitter diodes on the front panel allows monitoring for the technician without radiators.

LEDs on the front panel are indicating the operation mode: channel ON (red) and audio signal available (green).

Technical Data

Complies with international standard IEC914.

Connections

- VAN-IN (1 x RJ45-socket) for connection to the CDSVAN-PC¹⁾
- VAN-LINK (1 x RJ45-socket) for cascading (Audio) with a second MSI8V¹⁾
- LINE-OUT (8 x XLR-plug)AF outputs for audio recording
- RADIATORS (2 x BNC-socket)
1-10: Connection for up to 10 INFRACOM radiators IRad
11-20: Connection of up to 10 INFRACOM radiators IRad
- RF-LINK (1 x BNC-socket) for cascading (RF) with further MSI8V

Features

- Green lighted mains switch for power ON indication
- Red LEDs for channel switched ON
- Green LEDs for Audio available (AF)

Transmission frequency:

55kHz -975kHz in 40kHz steps (channel 22)
up to 1335kHz (channel 31)

Intermediate frequency: 455kHz

Measurements

- Distortion: < 0.2%
- Signal to noise-ratio: > 70dB
- Channel separation: > 60dB

Power Supply

- Mains power in: (90 ... 250)VAC, (50 ... 60)Hz
- Power consumption: 40VA max.

Housing

- 19", 2HU, Aluminium, "silver" anodized
- W x H x D: (433 x 88 x 305) mm
(17 x 3.5 x 12) inches
- Weight: 4.6 kg

Accessories (included in delivery)

- **Rubber feet** (four-piece set) for table assembly
- **Mounting brackets** (two-piece set) for rack assembly

BRÄHLER ICS is committed to continually improving its products and so reserves the right to make technical modifications without notice.

WPF06.4650.E.130604

¹⁾ via shielded CAT5 cable according to Brähler specification